

TROUBLE SHOOTING

PROBLEM	POSSIBLE CAUSE	SOLUTION
Light will not come on.	<p>A. Light switch is turned off.</p> <p>B. Fuse is blown or circuit breaker is turned off.</p> <p>C. Cord not plugged in.</p> <p>D. Cord frayed/worn/faulty.</p>	<p>A. Check if the Power switch on the LED Work Light is set to ON.</p> <p>B. Check if the GFCI has tripped. Check if the 120 Vac circuit breaker has tripped. Reset the GFCI or circuit breaker.</p> <p>C. Plug in cord to 120 Vac source.</p> <p>D. DO NOT USE WORK LIGHT.</p>

5 YEAR LIMITED WARRANTY

You should read all of the instructions before attempting to use this product.

International Development Corporation (IDC) warrants this product against defects in material or workmanship for a period of five (5) years from the date of original purchase. IDC agrees to either repair the product or replace it, at the sole discretion of IDC. Only the original purchaser of this product is extended this warranty. No warranty work will be provided under this warranty without purchaser's receipt or other proof of the date of original purchase acceptable to IDC. Proof of the date of purchase must be provided to IDC if the product is returned. Purchasing this product from a third party vendor negates all warranties (expressed or implied) in this warranty.

The warranty does not apply to the following terms/conditions: 1.) acts of God, 2.) products that have been subjected to unauthorized repair, opened, disassembled, and/or otherwise modified, 3.) products used not in accordance with directions, 4.) damages exceeding the total cost of product, 5.) plastic or plastic shades, 6.) the finish of any portion of the product (i.e. surface scratches, weathering, corrosion, discoloration of brass components, as this is considered normal wear and tear). 7.) damages caused by shipping, improper handling, accident, misuse or abuse. IDC is not responsible for damage of merchandise in transit. Repaired or replaced products shall be subject to the terms of this warranty and are inspected prior to return shipment. Damages that are incurred during transit should be reported at once to the carrier and a claim should be filed with them.

IDC SHALL NOT BE LIABLE FOR INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THE PRODUCT OR ARISING OUT OF ANY BREACH OF THIS WARRANTY. ALL IMPLIED WARRANTIES, IF ANY, INCLUDING IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED IN DURATION TO THE DURATION OF THIS EXPRESS WARRANTY. Some states do not allow the exclusion or limitation of incidental or consequential damages, or limitations on how long an implied warranty lasts, so the above exclusions or limitations may not apply to you. No other warranty, written or verbal, will be honored for this product. This warranty grants you specific legal rights, you may also have other rights which vary from state to state. There are no other warranties except those stated above.

Thank You

We appreciate your purchase of this IDC product. IDC has made every effort to supply a quality product that insures long, trouble-free service. In the event that you have any type of problems with this product and require a return address or for any other assistance please call our Toll Free Number 1-877-723-0723 • 8:00 A.M. - 5:00 P.M. Central Time, Monday - Friday • Email us at: customerservice@idctexas.com You will need the following information: Model/Item Number of Product, Receipt, and Date of Purchase


All drawings and text are © copyright of IDC • Printed in China

Honeywell



International Development, LLC.
 899 Henrietta Creek Rd. Roanoke, TX 76262 USA
 Toll-free: 1-877-723-0723

© 2016 IDC, all rights reserved.
 The Honeywell Trademark is used under license from Honeywell International Inc.
 Honeywell International Inc. makes no representations or warranties with respect to this product.
 This product is manufactured for International Development, LLC.

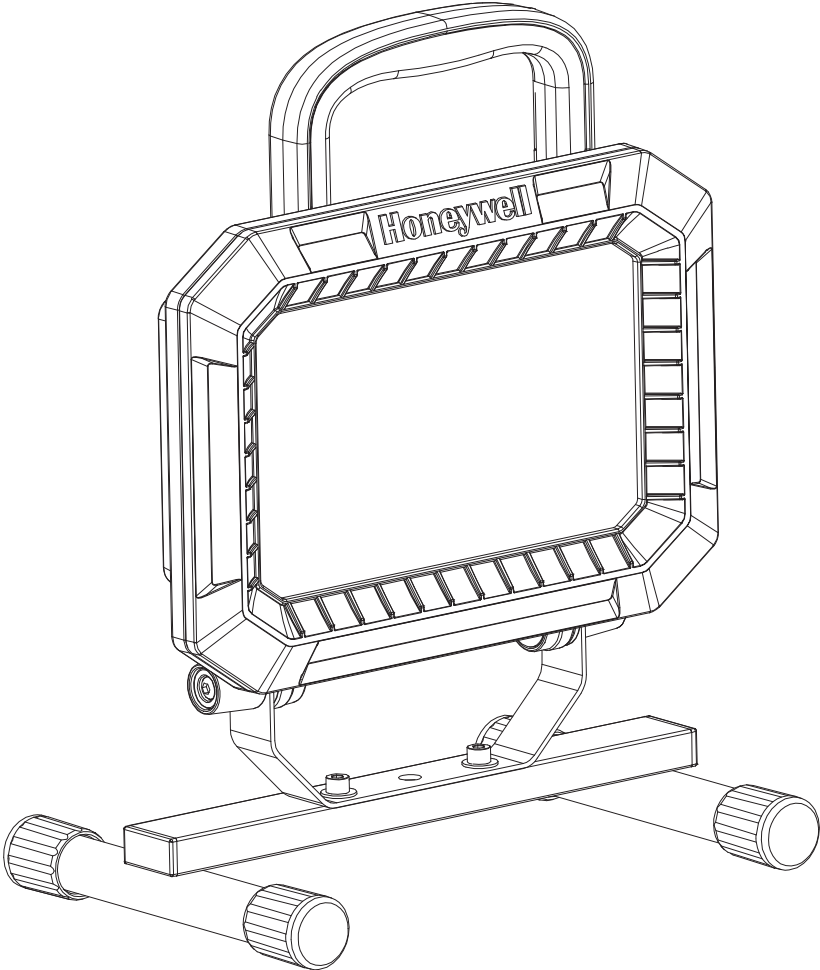

**LED PORTABLE WORK LIGHT
 WITH USB CHARGING PORT**
 MODEL: WK103501XXXXX
USE AND CARE GUIDE

SAFETY INFORMATION & POWER ON

READ ALL INSTRUCTIONS

WARNING: Read all safety precautions and installation instructions carefully before installing or servicing this fixture. Failure to comply with these instructions could result in a potentially fatal electric shock, fire, and/or property damage.

- When using outdoor portable work lights, basic safety precautions should always be followed to reduce the risk of fire, electric shock and personal injury.
- Use only a three-wire outdoor extension cord that has a three-prong grounding plug and grounded receptacles that accept the light's plug.
- Ground Fault Circuit Interrupter (GFCI) protection is to be provided on the circuit(s) or outlet(s) to be used for wet location. Receptacles are available having built-in GCFI protection and are able to be used for this measure of safety.
- Use only with an extension cord for outdoor use, such as an extension cord of cord type: SEW, SEOW, SE00W, SOW, SO0W, STW, STOW, ST00W, SJEW, SJEOW, SJE00W, SJW, SJOW, SJO0W, SJTW, SJTOW or SJT00W.
- Do not look directly at the LED Work Light when ON to avoid eye injury.
- Always keep the LED Work Light away from any flammable sources.
- Do not operate the LED Work Light if it has a missing or damaged lens cover.

Save These Instructions


FEATURES

- Rugged Glass Lens
- Suitable for wet location use
- ETL Certified
- Energy Star rated
- Equipment has been tested and found to comply with the limits pursuant to Part 15, Subpart B: 2012 of the FCC Rules. These limits are designed to provide reasonable protection against harmful electrical interference in a residential installation.




ASSEMBLY


HARDWARE INCLUDED



A:
Round Head Screws (2)
M5X8 Hex Socket



B:
Round Head Screws (2)
M6X8 Hex Socket



C:
Metal Washers (2)
6.5 mm


TOOLS REQUIRED



L-Shaped Hex Wrench
4 mm


ASSEMBLY

1. Attach Handle (1) to Lamp Head (2), lining up 2 holes on Handle to holes on Lamp Head.
2. Insert screws (A) through the holes.
3. Hand tighten with L-Shaped Hex Wrench (not included). Tighten the screws (A) until secure, but avoid over tightening.
4. Attach Lamp Head (2) to "H" Base (3), lining up 2 holes on "U" Bracket to hole on "H" Base (3).
5. Place metal washers (C) on screws (B).
6. Insert screws (B) through the washers (C), "U" Bracket and the "H" Base (3).
7. Fit the screws (B) into the pre-threaded nuts in the "H" Base.
8. Hand tighten with L-Shaped Hex Wrench. Tighten the screws (B) until secure, but avoid over tightening.

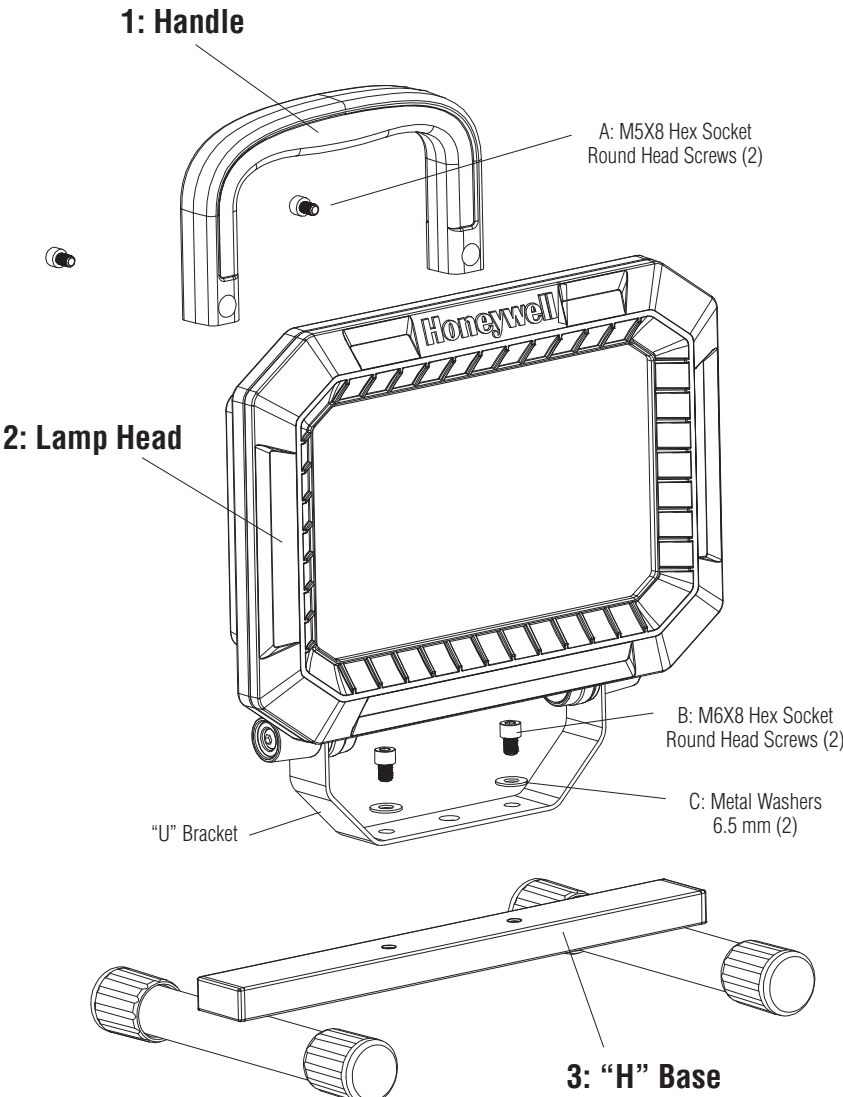


LAMP ANGLE ADJUSTMENT

1. Hold the LED Work Light by the ergonomic grip.
2. Holding the ergonomic grip, push forward or pull backward to adjust the LED Work Light.
3. Leave in desired position.

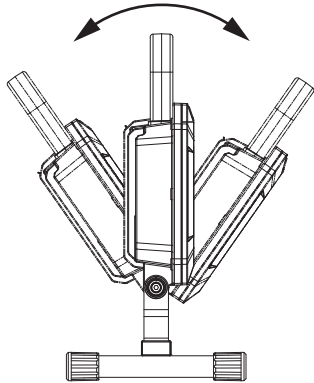


POWERING THE LED

1. Plug the power cord to the 120Vac, 60 Hz outlet.
2. On the back of the LED Work Light, press the toggle switch to the ON position.
3. To turn off the LED Work Light, press the toggle switch to the OFF position.



WARNING: RISK OF ELECTRIC SHOCK - Do not use extension cord near water or where water may accumulate. Keep light at least 16 feet from pools and spas. Keep plugs and receptacles dry. For use only on GFCI protected circuits.

USB CHARGING

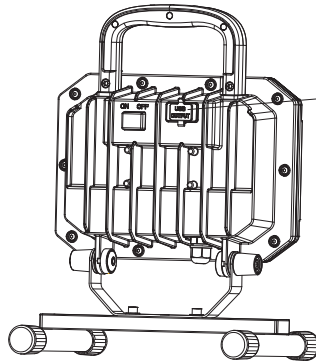

- Unit is equipped with a 2A/5V USB charging port to charge a portable electronic device.
- USB will charge device when plugged into outlet regardless if unit is powered ON/OFF.

NOTE: Always put protective cap back over USB port after use to protect from dirt or water.

CLEANING

- Allow the LED Work Light to cool down before cleaning or storing.
- Clean LED Work Light Lens with a non-abrasive cleaner.
- Clean/Wipe down the handle and base with a damp cloth or non-abrasive cleaner.